

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
9 June 2005 (09.06.2005)

PCT

(10) International Publication Number
WO 2005/051782 A1

(51) International Patent Classification⁶: B65D 5/72

(21) International Application Number:
PCT/US2004/039074

(22) International Filing Date:
19 November 2004 (19.11.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/716,642 19 November 2003 (19.11.2003) US

(71) Applicant (for all designated States except US): MEAD-
WESTVACO PACKAGING SYSTEMS LLC [US/US];
One High Ridge Park, Stamford, CT 06905 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): OLIFF, James, R
[US/US]; 530 Greystone Lane, Douglasville, GA 30134
(US). BATES, Aaron [US/US]; 4537 Planters Hill Drive,
Powder Springs, GA 30127 (US).

(74) Agents: SUZUKI, Tsugihiko et al.; The Mead Corpora-
tion, 4850D North Church Lane, Smyrna, 11 30080 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.


(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LU, MC, NL, PL, PT, RO, SE,
SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: CARTON WITH DISPENSER

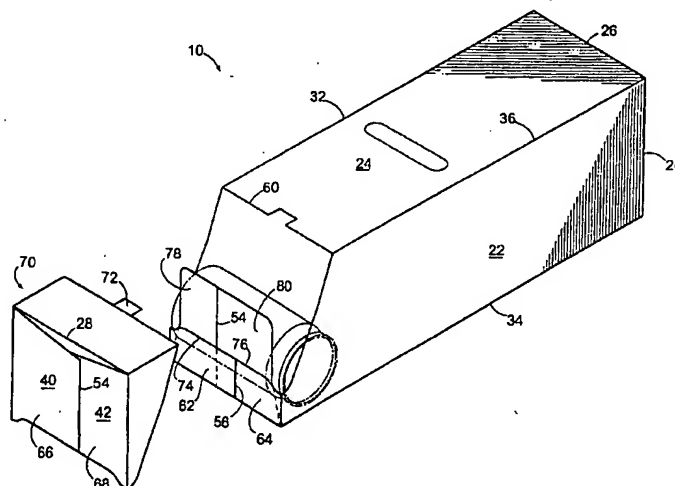

(57) Abstract: A carton (10) for dispensing articles having a dispensing feature with a built-in retention feature capable of being utilized as a promotional flag. A plurality of panels (20, 22, 24, 40, 42) are connected together to define an end of the carton. A displaceable portion (70) at the end of the carton may be detached from the carton end to define an opening for dispensing the articles from within the carton. Within the interior of the erected carton is a panel portion (78, 80) that is obscured from view within the carton prior to the displaceable portion (70) being at least partially detached from the carton. The panel portion is exposed to the exterior of the carton through the opening by at least partial detachment of the displaceable portion from the carton. A distal end (44, 46) of the panel portion extends into the opening for restraining articles within the carton. The panel portion may also be used as an ad panel to allow greater promotional flexibility.

BEST AVAILABLE COPY

WO 2005/051782 A1

CARTON WITH DISPENSER

TECHNICAL FIELD

The present invention relates generally to paperboard cartons for use in packaging articles and, more particularly, to a dispensing carton with a built-in combination retention and ad panel.

BACKGROUND OF THE INVENTION

Cartons are useful for allowing consumers to purchase, transport and store a desired quantity of articles such as soft drinks. For the convenience of the consumer, some cartons have dispensers which allow the articles to be removed one at a time while continuing to encase the remaining articles. A portion of the carton is torn out to form an opening from which articles may be dispensed.

Unfortunately, more than one article is often dispensed at a time through the opening which leads to many of the articles being dispensed onto the floor. This is because the articles to remain within the open carton are not sufficiently restrained by the open carton.

Also, it is often desirable to have a large surface area on the carton for labeling and advertising. However, in order to utilize the dispensing features of known dispensing cartons, portions of the carton may be permanently removed or positioned such that the available surface area is reduced.

Therefore, there is a need for an improved carton having a dispenser that is adapted to adequately restrain the articles within the open carton while also facilitating access to the endmost article to be dispensed from the carton. The improved carton must also appeal to the customer while maximizing the available surface area for advertising.

SUMMARY OF THE INVENTION

- 2 -

The present invention provides a carton having a dispensing feature with a built-in retention panel portion adaptable to also be utilized as a promotional flag to allow greater promotional flexibility.

5

Generally described, a plurality of panels are connected together to form the carton of the present invention. A displaceable portion at an end of the carton may be detached from the carton to define an opening for dispensing the articles from within the carton. Within the interior of the erected carton is a panel portion that is obscured from view prior to the displaceable portion being at least partially detached from the carton. The panel portion is exposed to the exterior of the carton through the opening by at least partial detachment of the displaceable portion from the carton. A distal end of the panel portion extends into the opening for restraining articles within the open carton. The panel portion may also have promotional indicia thereon to allow greater promotional flexibility.

15

According to one aspect of the present invention, the carton is formed from a single blank of a plurality of panels. At least one bottom panel includes an elongated end flap for forming the panel portion. The end flap is configured to extend into the opening to become visible through the opening from the exterior of the carton after the displaceable portion is at least partially detached. The distal end of the panel portion restrains the endmost article of a row of articles within the open carton until it is desirable to remove the endmost article from the carton.

The foregoing has broadly outlined some of the more pertinent aspects and features of the present invention. These should be construed to be merely illustrative of some of the more prominent features and applications of the invention. Other beneficial results can be obtained by applying the disclosed information in a different manner or by modifying the disclosed embodiments. Accordingly, other aspects and a more comprehensive understanding of the invention may be obtained by referring to the detailed description of the exemplary embodiments taken in conjunction with the accompanying drawings, in addition to the scope of the invention defined by the claims.

25
30

- 3 -

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 illustrates a plan view of one embodiment of a blank for forming the carton of the present invention having a built-in retention feature.

5

Fig. 2 is a perspective view of one embodiment of the carton of the present invention formed from the blank of Fig. 1.

Fig. 3 is a perspective view of one embodiment of the carton of the present invention formed from the blank of Fig. 1 with a portion of the carton removed for dispensing articles and illustrating the panel portion for restraining a lower row of articles.

10

Fig. 4 is a perspective view of one embodiment of the carton of the present invention formed from the blank of Fig. 1, illustrating the panel portion pivoted outward while continuing to restrain the lower row of articles.

15

DETAILED DESCRIPTION

Referring now to the drawings in which like numerals indicate like elements throughout the several views, the drawings illustrate an exemplary embodiment of a carton 10 of the present invention. In one embodiment, the carton 10 is for dispensing articles such as beverage cans.

20

Generally, the carton 10 is formed from a foldable sheet material such as paperboard blank 12 as shown in Fig. 1. The panels of the blank 12 are a first bottom panel 16, a second bottom panel 18, a first side panel 20, a second side panel 22, and a top panel 24. Alternatively, the blank 12 may instead include only a single bottom panel, similarly dimensioned to the top panel, rather than utilizing the combination of the first and second bottom panels 16 and 18 for forming the bottom of the erected carton 10.

25

As shown in Fig. 1, the panels of the blank 12 are hingedly interconnected in series to one another to form the basic tubular structure of the erected dispensing carton 10. The first bottom panel 16 is hingedly connected to the first side panel 20 by fold line 30. The first side

30

- 4 -

panel 20 is then hingedly connected to the top panel 24 by fold line 32. The second bottom panel 18 is hingedly connected to the second side panel 22 by fold line 34. The second side panel 22 is then hingedly connected to the top panel 24 by fold line 36. The blank 12 further includes a pair of end structures for forming end walls for at least partially closing the

5 opposite ends of the tubular structure. One of the end structures is formed from one minor end flap 48 and four major end flaps 40, 42, 44 and 46 while the other end structure is formed from three minor end flaps 94, 96 and 98 and two major end flaps 100 and 102. The end flaps 40, 42, 44, 46 and 48 are hingedly connected respectively to the panels 20, 22, 16, 18 and 24 by a transverse fold line 28 whereas the end flaps 94, 96, 98, 100 and 102 are hingedly

10 connected respectively to the panels 16, 18, 24, 20 and 22 by a transverse fold line 26. Fold lines 26 and 28 each extends the full length of the blank 12.

The major end flaps 40 and 42 extend from the side panels 20 and 22, respectively. The major end flaps 44 and 46 and the minor end flap 48 extend from the bottom panels 16 and 18 and the top panel 24 respectively and provide the innermost layer of the one of the end walls of the carton 10. The one end wall constitutes at least a part of the dispensing end from where the articles in the carton are dispensed as described in more details later. The end flaps of bottom panels of known dispensers are typically minor flaps. However, the end flaps 44 and 46 of the present invention are elongated to extend beyond the distal end of the minor end flap 48 and, preferably, beyond the distal ends of major flaps 40, 42 as shown in Fig. 1.

15 20

The major end flaps 100 and 102 extend from the side panels 20 and 22, respectively. The minor end flaps 94, 96 and 98 extend from the bottom panels 16 and 18 and the top panel 24 respectively and provide the innermost layer of the other end wall of the carton 10. The bottom end flaps 94 and 96 are typical minor flaps and are of a length as great as the minor end flap 98.

25

In order to erect the carton 10 as shown in Fig. 2, the bottom panel 16 and the bottom panel 18 are glued or are otherwise secured together to form the bottom of the carton 10. At the same time, the side edges 52 and 54 of the major flaps 44 and 46 are also secured together in an overlapping manner to create a composite bottom major flap. The side edges of the minor flaps 94 and 96 are also secured together to form a composite bottom minor flap. After the

30

- 5 -

carton is erected in an open-ended tubular form and the articles are loaded into the carton 10, the end structures are folded to form the opposed end walls of the carton 10.

5 Closure of the dispensing end of the carton 10 is initiated by folding the top end flap 48 along the fold line 28 through about 90 degrees and then folding the composite bottom major flap 44 and 46 along the fold line 28 through 90 degrees. Next, the side major end flaps 40 and 42 are folded along the fold line 28 over the end flaps 44, 46 and 48, and the distal ends of major flaps 40 and 42 are secured together in an overlapping manner to create an outermost layer of the one end wall of the carton 10. Closure of the other end of the carton may be achieved in a similar manner.

10

The erected carton 10 illustrated in the drawings is adapted to hold a group of similarly dimensioned, cylindrical articles (such as cans or bottles), in a plurality of vertically arranged rows (two rows in Figs. 2 and 4). The articles in each row are disposed on their sides in a side-by-side parallel fashion. The side panels 20, 22 are disposed alongside the ends of the articles of the group while each end flap of the carton is disposed adjacent to the side walls of the respective endmost articles.

15

In one embodiment of the present invention, a weakened line 60 extends across each major panel 40 and 42, side panels 20 and 22, and top panel 24, as best shown in Fig. 1. The weakened line 60 on the top panel 20 is displaced from the dispensing end of the carton 10. Portions of the carton that lie on either side of the weakened line 60 may be severed from one another along the weakened line. In one embodiment, the portion of the weakened line 60 across the major flaps 40 and 42 is a fold line segment that serves as a hinge about which opposing panel portions may be pivoted with respect to one another while the other portion of the weakened line 60 is a tear line segment along which the carton panels may be severed.

20

25

The weakened line 60 is used as a reference for defining the lower portions 62, 64 and upper portions 66, 68 of the major flaps 40, 42. The weakened line 60 may be a line of severance or a hinge-providing line that facilitates separation or folding of the panel portions lying on either side of the weakened line 60. It is contemplated that weakened lines include, but are

30

- 6 -

not limited to, perforated lines, tear strips, score lines, half-cut lines, lines of short slits, lines of nick members, or the equivalents.

5 The weakened line 60 terminates at edges 56 and 58 of the major flaps 40 and 42, respectively. The full extension of the weakened line 60 defines a displaceable portion 70 when the carton 10 is erected. The displaceable portion 70 may be configured as shown in Figs. 2 and 3, or alternatively configured into what is commonly referred to as a "trough" or "bucket". The displaceable portion 70 is at least partially detachable from the carton 10, as shown in Fig. 3, to form an opening to permit dispensing of the articles from the carton 10. A
10 tab 72 borders the weakened line 60, preferably on the top panel 24, which may be pushed through or pulled out to initiate detachment of the displaceable portion 70.

The weakened line 60 allows the upper portion 66 of the major flap 40 and the upper portion 68 of the major flap 42 to be removed from, or pivoted with respect to, the erected carton 10.
15 The upper portions 66, 68 removed from, or pivoted with respect to, the overlapping major flaps 40, 42, along with portions of the side panels 20, 22, and the top panel 20, define the preferred configuration of the displaceable portion 70. The combined lower portions 62, 64 of the major end flaps 40, 42 remain with the carton 10 after the displaceable portion 70 has been removed or pivoted downwardly. The upper edge 74 of the combined lower portions
20 62, 64 partially defines the opening through which the packaged articles are dispensed.

The bottom major end flaps 44, 46 each also includes a weakened line 76 such as a fold line or a frangible/tear line for defining on either side distal panel portions 78, 80 and proximal panel portions 82, 84. In some embodiments, portions of the end flaps 44, 46 that lie on
25 either side of the weakened line 76 may be severed from one another once the carton 10 is erected and opened. Each weakened line 76 is preferably substantially parallel to transverse fold line 28. When end flaps 44, 46 are secured together to erect the carton 10, the weakened lines 76 of the end flaps 44 and 46 cooperate with one another to substantially form a continuous line 76 across the width of the composite bottom major flap 44 and 46. The full
30 extent and orientation of the weakened line 76 then preferably corresponds substantially with the adjacent upper edge 74 of lower portions 62, 64.

- 7 -

Until the displaceable portion 70 is at least partially detached from the remainder of the carton 10, the combined distal panel portions 78, 80 are obscured from view. Because the end flaps 44, 46 are the innermost layer of the end wall at the dispensing end of the erected carton 10, the proximal panel portions 82, 84 are behind the lower portions 62, 64 of the end flaps 40, 44 in a face-to-face relationship. This face-to-face relationship is maintained even after the displaceable portion 70 is completely detached from the carton 10. Only after the displaceable portion 70 is at least partially detached from the carton 10, are the combined distal panel portions 78, 80 visually exposed to the exterior of the carton 10 through the opening.

10

As best shown in Figs. 3 and 4, the combined distal panel portions 78, 80 extend beyond the upper edge 74 and into the opening. The combined distal panel portions 78, 80 may be utilized to retain the endmost article in the lower row of articles, yet allow removal of the endmost article when desired by the consumer. Alternatively, the combined distal panel portions 78, 80 may be utilized to retain the endmost article in both the upper and lower rows of articles when the blank 12 is configured differently such that the bottom end flaps 44 and 46 are greater in vertical length than the diameter of each cylindrical article packaged in the carton 10.

15

As shown in Fig. 4, the combined distal panel portions 78, 80 may be folded or pivoted along the weakened line 76 relative to their corresponding proximal panel portions 82, 84. Even though the combined distal panel portions 78, 80 are pivoted outward over the upper edge 74, the endmost article may continue to be restrained within the carton 10.

20

In one embodiment, the combined distal panel portions 78, 80 may include a graphic surface facing outwardly of the carton. The graphic surface carries indicia such as advertising which becomes visible to the consumer upon opening the carton 10 for dispensing articles. The indicia may be such that the combined distal panel portions 78, 80 serve as a voucher/coupon or a game piece (such as a lottery ticket). In such case, the weakened line 76 may be a line of severance or a tear line so that the voucher or the game piece may be detached from the proximal panel portions 82, 84 along the weakened line 76.

25

30

- 8 -

The present invention has been illustrated in relation to a particular embodiment which is intended in all respects to be illustrative rather than restrictive. Those skilled in the art will recognize that the present invention is capable of many modifications and variations without departing from the scope of the invention. Accordingly, the scope of the present invention is
5 described by the claims appended hereto and supported by the foregoing.

- 9 -

CLAIMS

1. A carton for dispensing articles, comprising:
a plurality of panels defining a carton end;
5 a displaceable portion detachably connected to said carton end to be at least partially detached from said carton to define an opening for exposing an endmost article in the carton for removal, said displaceable portion at least partially defined by a first weakened line in some of said panels, said opening defining an upper edge of said carton end when said displaceable portion is at least partially detached from said carton end along said first
10 weakened line; and
a panel portion visually exposed to an exterior of said carton through said opening by at least partial detachment of said displaceable portion from said carton end, a distal end of said panel portion extending upwardly beyond said upper edge and into said opening for restraining articles within said carton, said distal end is connected to a remainder of said
15 panel portion along a second weakened line corresponding substantially with said upper edge of said carton end so as to be pivotable along said second weakened line.
2. The carton of Claim 1 wherein said distal end of said panel portion is detachable along said weakened line.
20
3. The carton of Claim 1 or 2 wherein said distal end of said panel portion includes a graphic surface carrying promotional indicia thereon.
4. The carton of any of Claims 1-3 wherein said distal end of said panel portion is a
25 game piece.
5. The carton of Claim 3 wherein said distal end of said panel portion is a voucher.
6. The carton of any of Claims 1-5 wherein said panel portion is formed from an end
30 flap hingedly connected to a bottom panel of the carton.

- 10 -

7. The carton of any of Claims 1-5 wherein said panel portion is formed from a pair of secured major end flaps hingedly connected respectively to a pair of secured bottom panels of the carton.

- 5 8. A carton formed from a single blank, said blank comprising:
- a top panel;
 - a side panel connected along a fold line to each opposing edge of said top panel;
 - a first bottom panel connected along a fold line to one of said side panels at an edge thereof opposite said top panel, said top panel, said side panels, and said bottom panel
- 10 defining a tubular structure;
- an end structure for at least partially closing each of opposite ends of said tubular structure;
 - a displaceable portion detachably connected to said carton to be at least partially detached from said carton to define an opening for exposing an endmost article in said carton
- 15 for removal, said displaceable portion at least partially defined by a first weakened line in said carton, said opening defining an upper edge of one of said end structures when said displaceable portion is at least partially detached from said carton along said first weakened line; and
- a panel portion within said interior obscured from view prior to said displaceable
- 20 portion being at least partially detached from said carton, said panel portion visually exposed to the exterior of said carton through said opening by at least partial detachment of said displaceable portion from said carton, a distal end of said panel portion extending beyond said upper edge and into said opening for restraining articles within said carton, said distal end being connected to a remainder of said panel portion along a second weakened line
- 25 corresponding substantially with said upper edge of said one end structure so as to be pivotable along said second weakened line.

9. The carton of Claim 8 wherein said distal end of said panel portion is detachable along said second weakened line.

30 10. The carton of Claim 8 or 9 wherein said distal end of said panel portion includes a graphic surface carrying promotional indicia thereon.

- 11 -

11. The carton of any of Claims 8-10 wherein said distal end said panel portion is a game piece.

5 12. The carton of any of Claims 10 wherein said distal end of said panel portion is a voucher.

13. The carton of any of Claims 8-12 wherein said panel portion is formed from an end flap hingedly connected to said bottom panel.

10

14. The carton of any of Claims 8-12 further comprising a second bottom panel connected along a fold line to the other side panel at an edge thereof opposite said top panel, said first and second bottom panels being secured together so that said tubular structure is formed by said top panel, said side panels, and said first and second bottom panels, wherein said panel
15 portion is formed from a pair of secured major end flaps hingedly connected to said first and second bottom panels respectively.

15. A blank for forming a carton, comprising:

20 a plurality of panels connected in series to define a carton end when the blank is erected into a tubular carton;

a displaceable portion detachably connected to at least some of said panels for defining said carton end to be at least partially detached from said carton to define an opening for exposing an endmost article in the carton for removal, said displaceable portion at least partially defined by a first weakened line in said at least some of said panels, said opening
25 defining an upper edge of said carton end when said carton is erected and said displaceable portion is at least partially detached from said carton end along said first weakened line; and

a panel portion visually exposed to an exterior of said carton through said opening by at least partial detachment of said displaceable portion from said carton end, a distal end of said panel portion extending upwardly beyond said upper edge and into said opening when
30 said carton is erected and said detachable portion is at least partially detached from said carton end, said distal end is connected to a remainder of said panel portion along a second weakened line corresponding substantially with said upper edge of said carton end when said

- 12 -

carton is erected and said detachable portion is at least partially detached from said carton end.

1/4



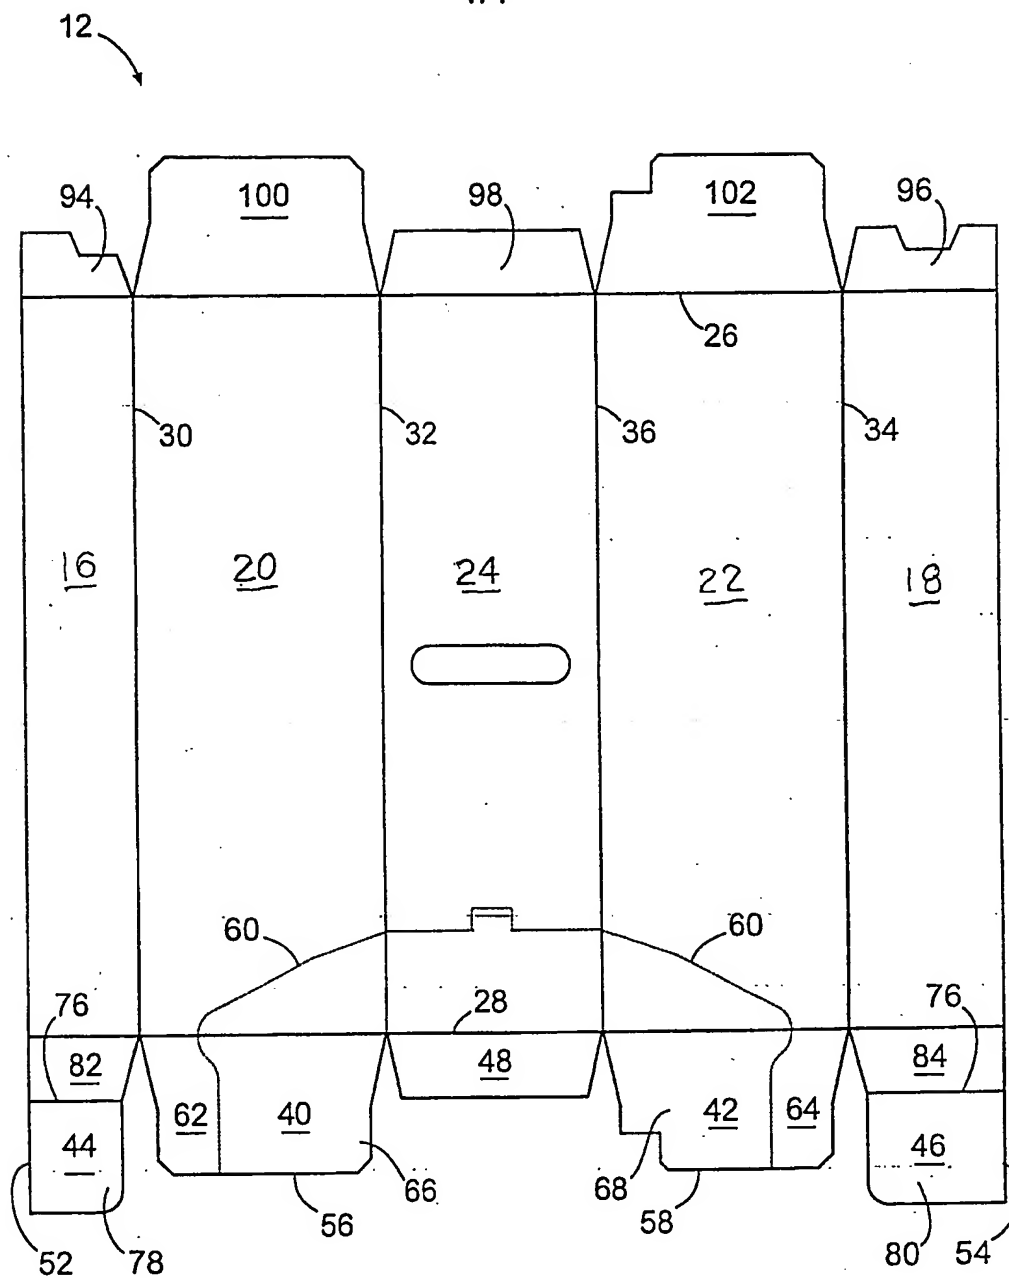


FIG 1

2/4

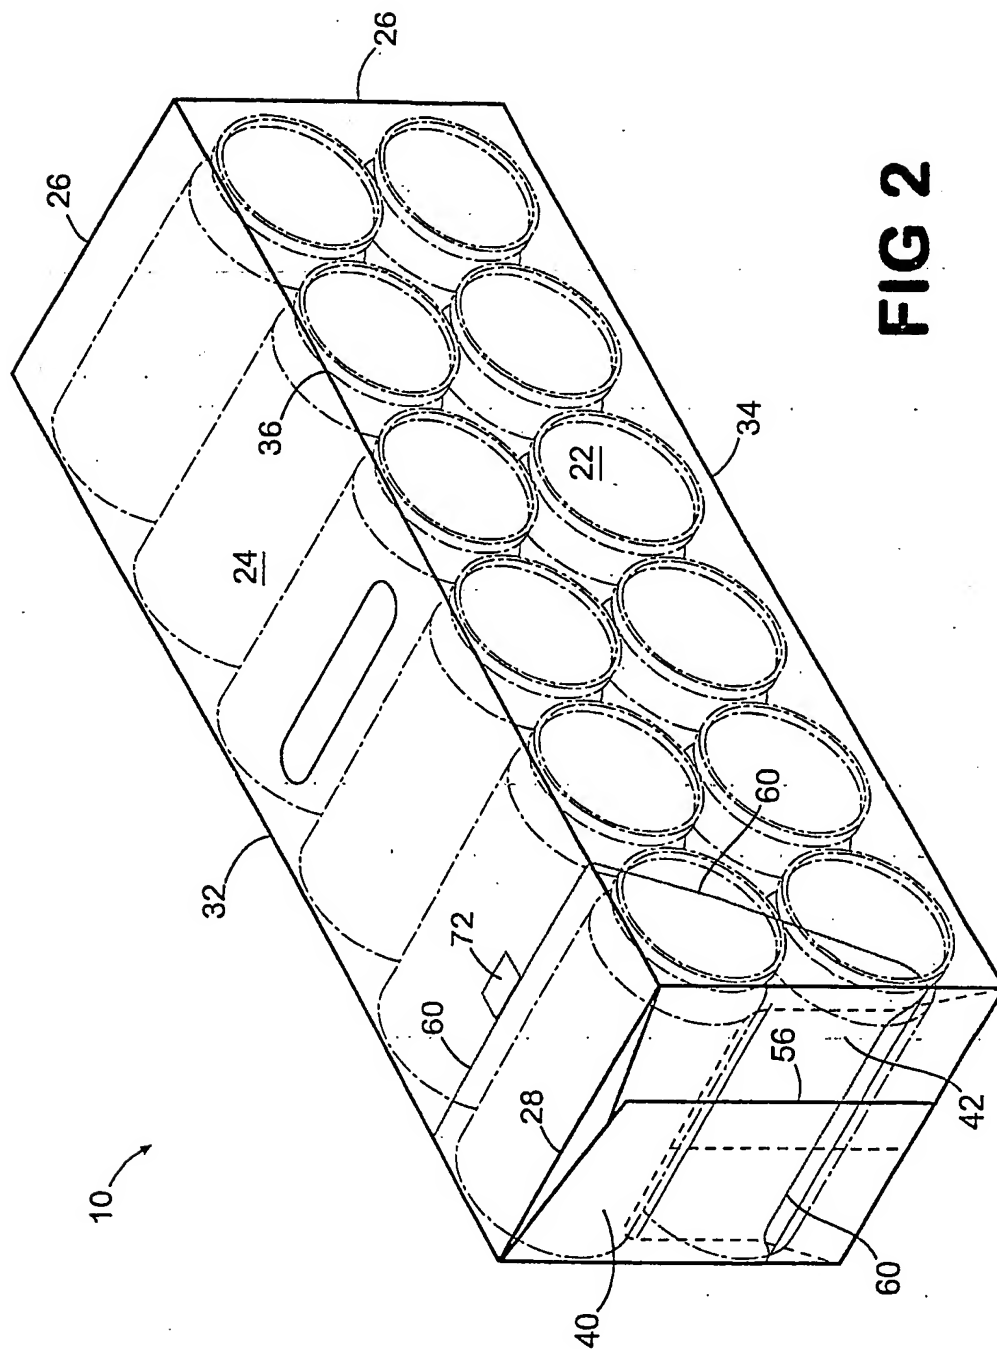

3/4

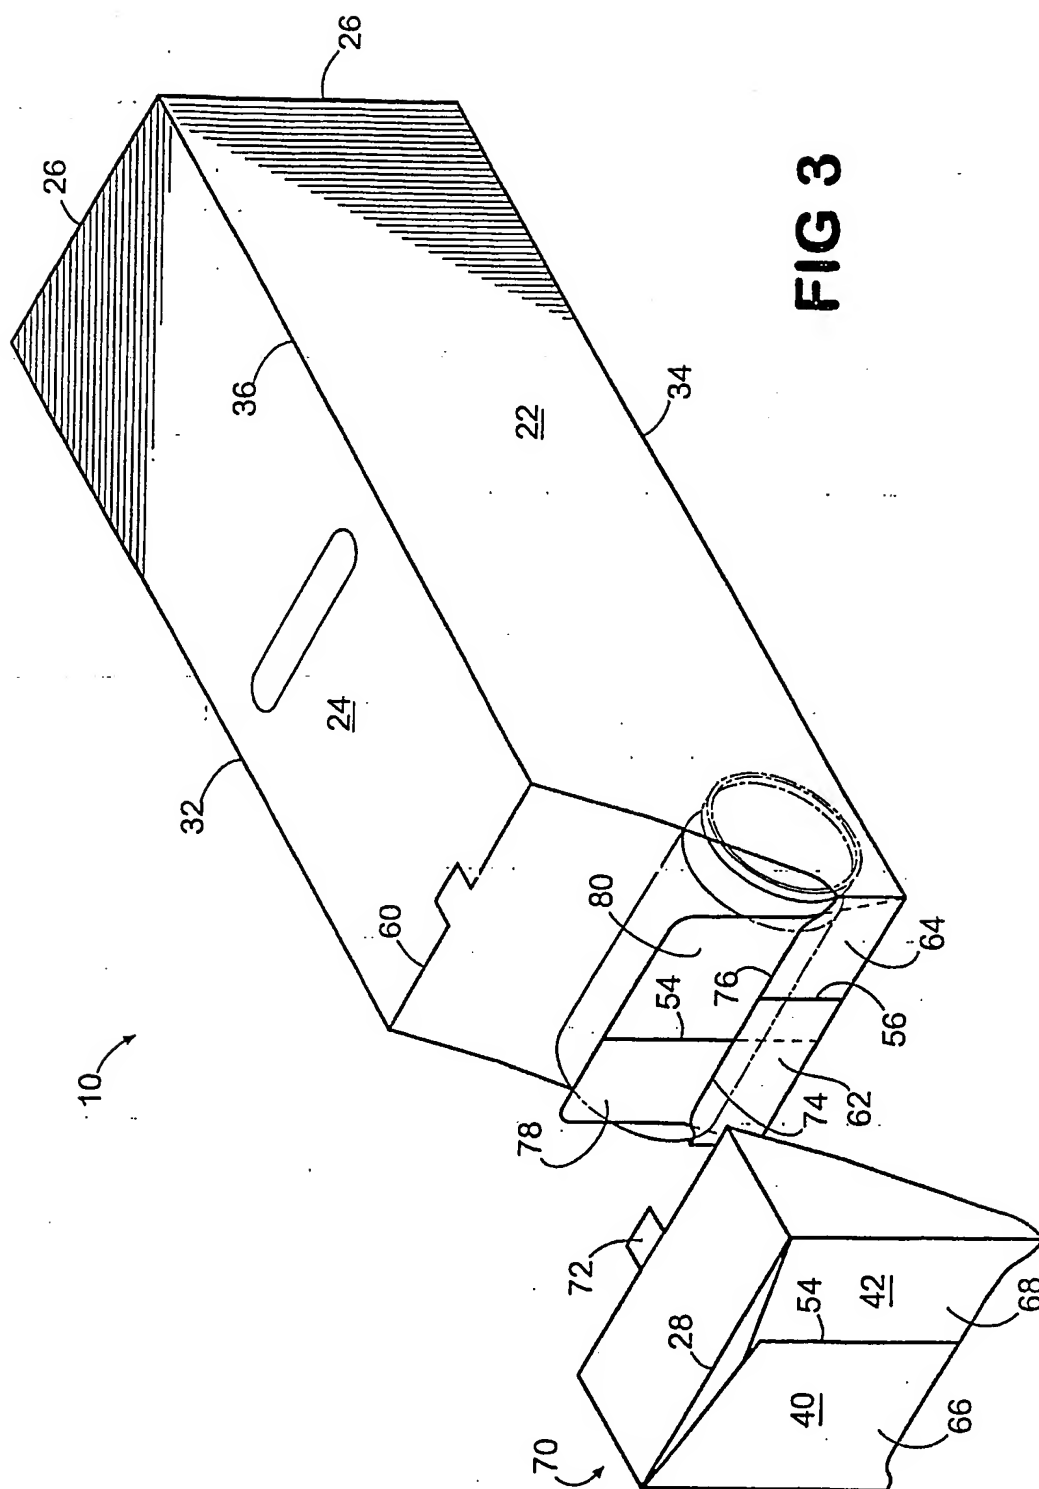

316

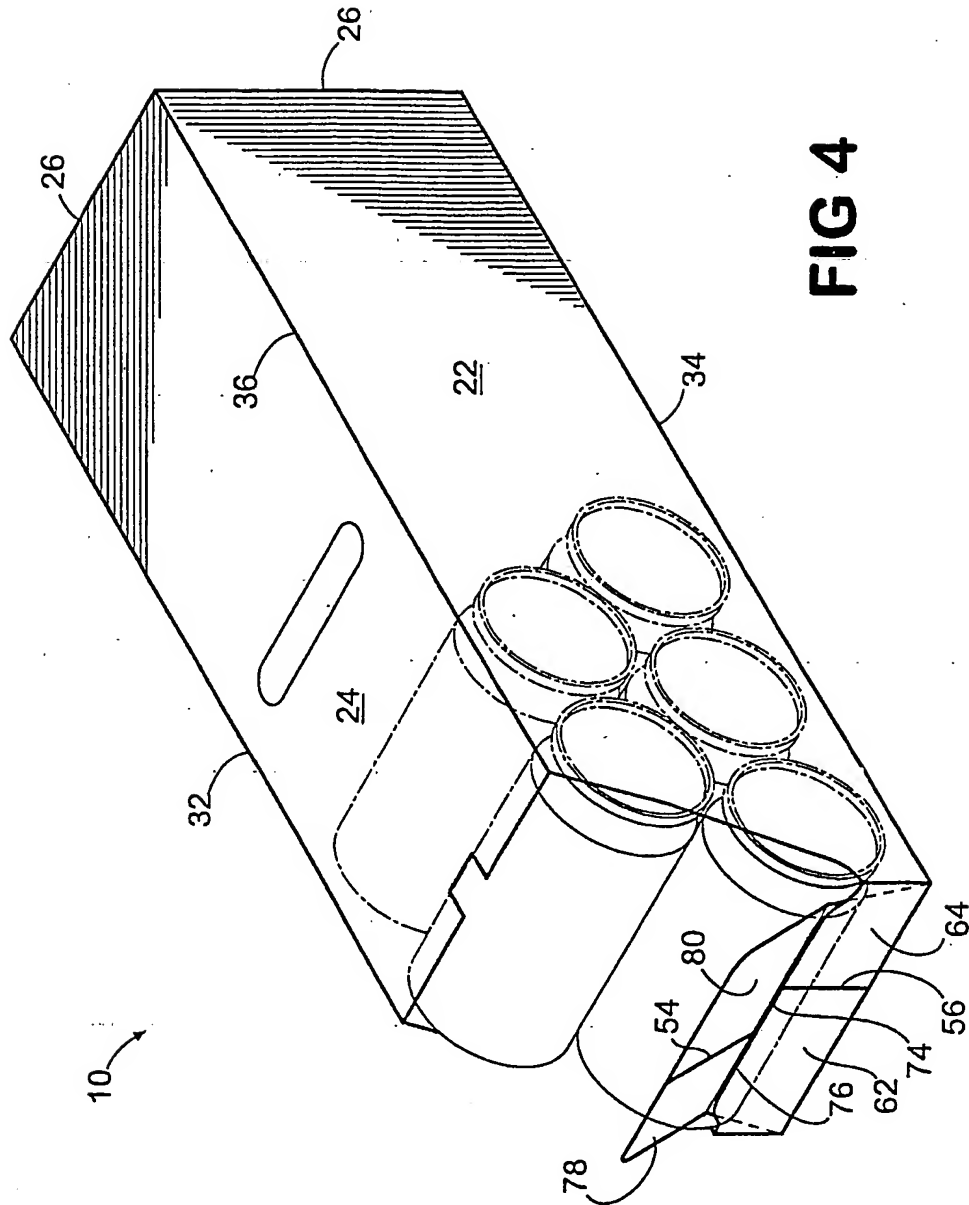


FIG 4

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US2004/039074

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 B65D5/72

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B65D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2 881 967 A (RINGER WILLIAM A) 14 April 1959 (1959-04-14)	1,2,6,8, 9,13,15
Y	column 1, line 55 - column 3, line 42; figures 1-4	3-5,7, 10-12,14
Y	US 2003/192907 A1 (BATES AARON L) 16 October 2003 (2003-10-16) paragraphs '0038! - '0044!; figures 4-6	7,14
Y	WO 97/22528 A (THE PROCTER & GAMBLE COMPANY; ERBE, HELMUT, NORBERT) 26 June 1997 (1997-06-26) page 3, line 13 - page 6, line 7; figures 1-3	3-5, 10-12

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

3 March 2005

Date of mailing of the international search report

14/03/2005

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Augustin, W

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US2004/039074

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 2881967	A	14-04-1959	NONE	
US 2003192907	A1	16-10-2003	US 2002070139 A1	13-06-2002
			US 2003141313 A1	31-07-2003
			AU 3084902 A	24-06-2002
			BR 0116130 A	28-10-2003
			CA 2462363 A1	20-06-2003
			EE 200300277 A	15-10-2003
			EP 1360116 A2	12-11-2003
			HU 0302365 A2	28-10-2003
			JP 2004521032 T	15-07-2004
			NO 20032640 A	07-08-2003
			PL 361670 A1	04-10-2004
			SK 8822003 A3	08-01-2004
			WO 0247990 A2	20-06-2002
WO 9722528	A	26-06-1997	DE 29519931 U1	29-02-1996
			AU 1083997 A	14-07-1997
			BR 9612033 A	29-06-1999
			CA 2240148 A1	26-06-1997
			CZ 9801743 A3	14-07-1999
			EG 21622 A	31-12-2001
			EP 0874758 A1	04-11-1998
			HU 9902280 A2	28-05-2000
			JP 11500699 T	19-01-1999
			NO 982726 A	17-08-1998
			TR 9801081 T2	21-09-1998
			WO 9722528 A1	26-06-1997
			ZA 9610476 A	24-06-1997

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.